

Copying Best Practice Configuration

This guide describes how to copy configurations from SAP best practice client, ERD client 050, to the main development client ERD client 100.

Introduction

SAP Best practice (BP) has been activated in ERD client 050 using alternative 1 method as discussed in [KDD071 - Development System Approach](#).

To view which BP has been activated, please see "3. BP Scope Items" worksheet. Countries in scope for BP activation are highlighted in Green.

Copy Methods

There are 3 methods to copy configurations. Method 1 and 2 are preferred as it reduces the number of TRs which can lead to performance issues when ERD has large number of TRs.


Method 1: Manual Copy & Paste

Launch WebGUI or SAPGUI for both client 050 and 100, copy and paste configuration. Suitable for simple configurations.

Method 2: Use Standard SAP functions to copy Configurations

When logged in to ERD client 100, use Utilities -> Adjustment in TCode SM30 or SPRO. For more details, see [SAP Note 2435438](#).

When prompted for the RFC connection of the comparison client, please use ERDCLNT050 (login not required).

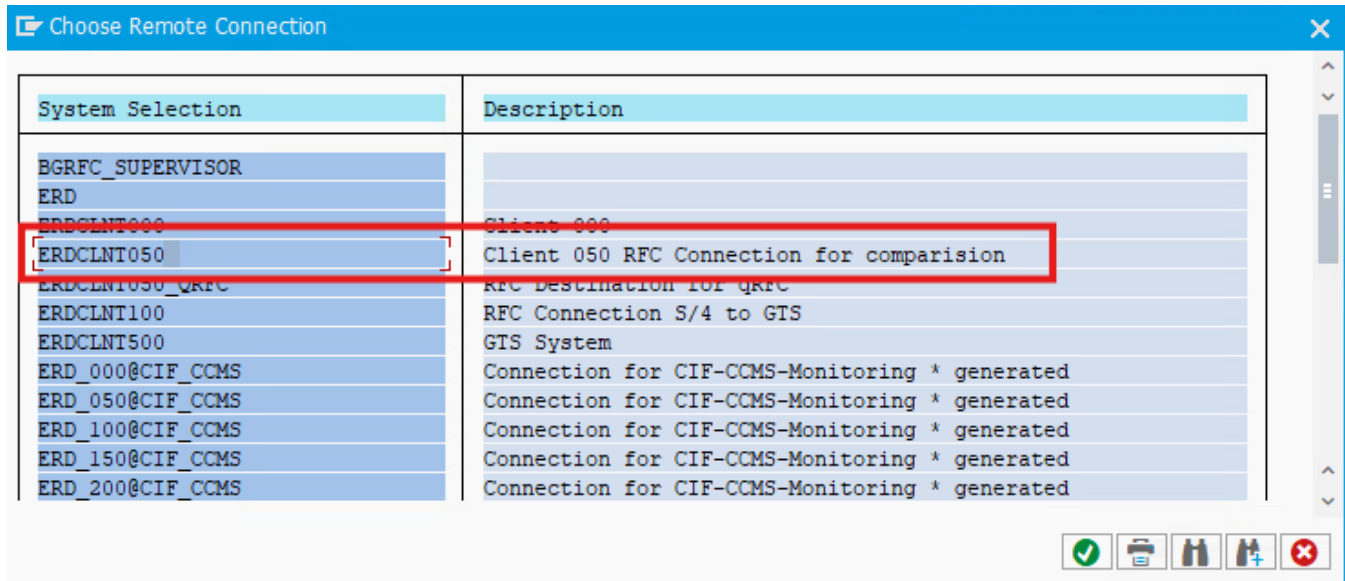

Method 3: TR and SCC1

If method 1 and 2 are not suitable, please create a TR in client 050 and add the required configurations. After TR is created, use SCC1 to copy the TR to client 100.

Currently client 050 is not open and users have read only access. If you encounter an authorization issue please contact the security or basis team.