

# House Cleaning Procedure / housekeeping

## Introduction

### OSS notes related to housekeeping

Preventing Basis tables from increasing considerably.

2388483 - How-To: Data Management for Technical Tables

[2388483 - How-To: Data Management for Technical Tables](#)

Old oss note related to Housekeeping : 706478

### Why do we need a house cleaning procedure ?

This procedure explains how to delete data from the BW servers which are no longer useful. There are several reasons for doing that :

- It **increases the overall performances of the system** (Reading in a table with 1M lines is faster than on a table with 10M lines)
- It **reduces the cost of the BW server hosting** : the price of the hosting depends on the number of Go of storage used.
- It makes maintenance and **overall usage of BW easier/clearer** for everyone as you no longer have to filter out obsolete objects.
- It shortens the time taken to copy servers (ex : prod to quality) and therefore save time for technical team but also **reduces the downtime of the servers** for those operations.

For reference, the cost of 1 Go (depends on the SLA level & decreases with time - Empty storage about 20% is not invoiced) :


| Storage Cost €/Go                      | 2015 | 2016 |
|----------------------------------------|------|------|
| L1 - WBP                               | 1.78 | 1.68 |
| L2 - PQ1 / PQ2 / WBD                   | 0.99 | 0.94 |
| L3 - WB1 / WBQ / SQ1 / SQ2 / DQ1 / DQ2 | 0.5  | 0.47 |

### Overall logic of the house cleaning procedure

In this clean 4 main types of data :

## Housekeeping activities Focus areas

SAP

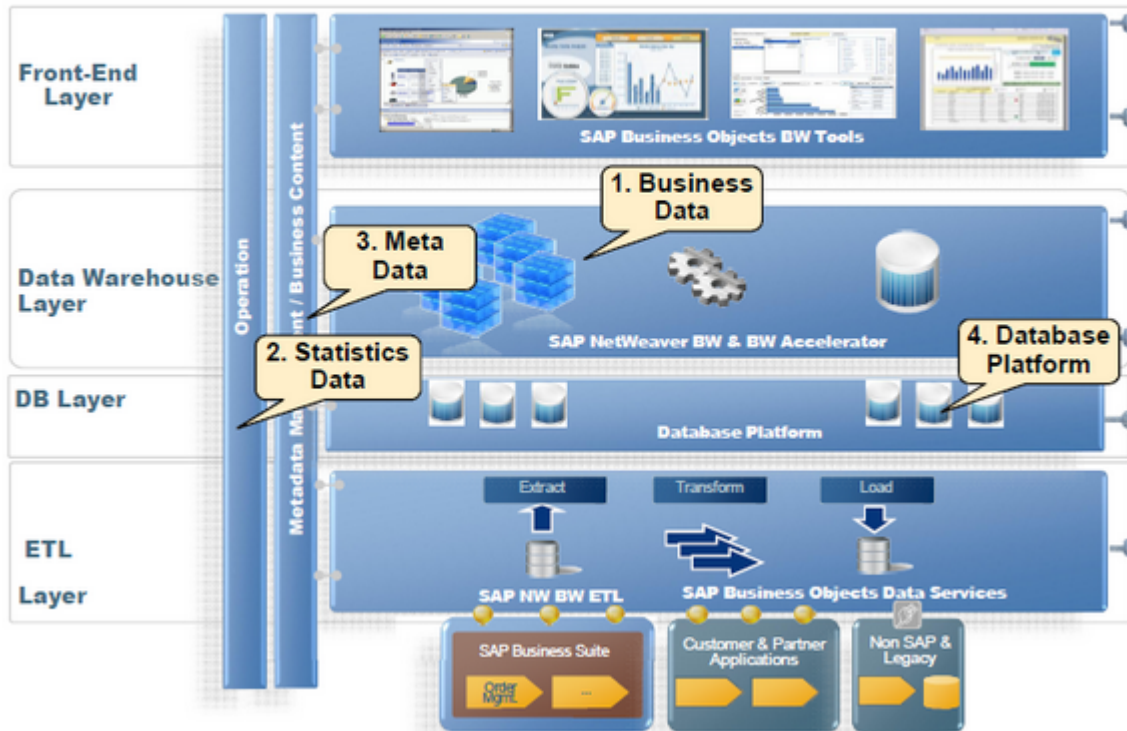

- 1 - Business Data : The data used by the reports and users. It's all the data found in the info-providers and related objects.
- 2 - Statistics Data : All the logs and historical saved data that results of the usage and maintenance of BW.
- 3 - Meta Data : Basically the content created by the users. Queries, workbooks, bookmarks...
- 4 - Database Platform : All data generated by oracle and SAP internally (Usually not much we can do).

## When to run this procedure

The full procedure should only be conducted once a year on each server and mainly on the production servers.


- Keep in mind that some processes take a long time to run and take processes. Better run when server is under light workload.
- It's best to do it just before the production server is copied to quality/simulation in order to shorten the copy process.
- Each step can be run individually on different schedules.

## How to check the size of the database & tables

Full database and individual table sizes can be checked via DB02 transaction. In that transaction there are several functions that are useful.

## Full database overview

You can have a look at the overall server size by going to the "Overview". Then select "History" and either days/weeks or months :

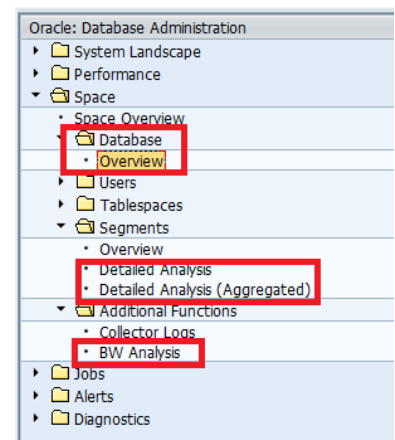

| Main Data History                         |      |          |                |          |                |         |                |       |                 |       |
|-------------------------------------------|------|----------|----------------|----------|----------------|---------|----------------|-------|-----------------|-------|
| Days Weeks Months                         |      |          |                |          |                |         |                |       |                 |       |
| Months (Last analysis: 20150801 07:05:21) |      |          |                |          |                |         |                |       |                 |       |
| Date                                      | Name | Size(Gb) | Chg.Size/month | Free(Gb) | Chg.Free/month | Used(%) | Chg.Used/month | Users | Chg.Users/month | Users |
| 01.08.2015                                | WBP  | 6,404.09 | 152.05         | 462.71   | 3.99           | 93      | 0              | 12    | 0               | 12    |
| 01.07.2015                                | WBP  | 6,279.09 | 127.48         | 509.17   | 58.20          | 92      | 1              | 12    | 0               | 12    |
| 01.06.2015                                | WBP  | 6,151.61 | 256.79         | 567.37   | 45.91          | 91      | 0              | 12    | 0               | 12    |
| 01.05.2015                                | WBP  | 5,894.82 | 149.49         | 521.46   | 56.02          | 91      | 1              | 12    | 0               | 12    |
| 01.04.2015                                | WBP  | 5,745.33 | 1.85           | 577.48   | 32.82          | 90      | 1              | 12    | 0               | 12    |



#### DB02 not updated

DB02 should be updated daily - If it is not up to date, contact the SAP Technical team and ask them to correct the scheduling of the job.

- Size(Gb) : Total size of the BW server storage. Includes both free and used space
- Chg.Size : Change of size of the total size between this measurement and the previous one in Go
- Free(Gb) : Size of the free available space.
- Chg.Free : Change of the free space size between this measurement and the previous one in Go.
- % Used : Percentage of total space used = (Size(Gb) - Free (Gb)) / Size (Gb)

You can calculate the used space by simply doing : Size(Gb) - Free(Gb)

## Tables sizes

You can check the individual table sizes via the "Segments" section.

- In "Overview" --> Top Sizes you have the top 100 largest tables :

| Main Data Top Sizes Top Extents Top Growth Critical Objects Summary History |                  |           |       |            |             |          |            |
|-----------------------------------------------------------------------------|------------------|-----------|-------|------------|-------------|----------|------------|
| Top Sizes (Last analysis: 13.08.2015 20:05:14)                              |                  |           |       |            |             |          |            |
| Owner                                                                       | Name             | Partition | Type  | Tablespace | Size(MB)    | #Extents | #Blocks    |
| SAPSR3                                                                      | RSBERRORLOG      |           | TABLE | PSAPSR3    | 279,284.813 | 7,299    | 35,745,450 |
| SAPSR3                                                                      | /BIC/AODS_OFA000 |           | TABLE | PSAPSR3ODS | 137,512.080 | 4,685    | 17,601,538 |
| SAPSR3                                                                      | /BIC/AODSFG100   |           | TABLE | PSAPSR3ODS | 125,177.875 | 4,127    | 16,022,768 |
| SAPSR3                                                                      | RSBATCHDATA      |           | TABLE | PSAPSR3    | 107,800.375 | 5,930    | 13,796,448 |
| SAPSR3                                                                      | /BIC/AODSFG1300  |           | TABLE | PSAPSR3ODS | 103,608.375 | 3,413    | 13,261,872 |
| SAPSR3                                                                      | /BIC/AODSFG1000  |           | TABLE | PSAPSR3ODS | 103,270.080 | 5,177    | 13,218,560 |



#### Top 100 in Overview

Note that in the Overview Top Sizes, it shows the size of the individual tables. This is not a very complete approach as many tables are actually much larger once you add indexes, logs and partitions

- Detailed Analysis : this shows the individual table sizes - Use "Detailed Analysis Aggregated" instead.
- Detailed Analysis (Aggregated) : Shows the tables size including all related objects (Index, Lobs, Partitions)

## Tips on DB02 table sizes

To measure the real size of a table, it is not enough to check only the table itself. You may be underestimating the size.

To have the full picture, you need to check all objects relative to that table :

- Indexes : most large tables have 1 or more index which can take a lot of space
- Lob Segments : In cases a lob segment is attached to the table. The lob segment is used to store the actual large data and therefore it could look like the table itself is very small... but the lob could be very large. Ex : The BW workbooks list is stored in the RSRWBSTO RE table, but the actual workbooks data is stored in the attached Lob Segment
- Partitions : Large tables (and info-providers dimensions) can be split in many different partitions. You need to include all partitions.

## Main system tables descriptions

| Table           | Description                                    |
|-----------------|------------------------------------------------|
| ARFCSDATA       | tRFC tables - SM58                             |
| BALDAT          | Application log (Details) - Logs from SLG1     |
| BALHDR          | Application Header                             |
| C_OBJ#_INTCOL#  | Cluster tables                                 |
| D010INC         | Where used table                               |
| D010TAB         | Where used table                               |
| DBTABLOG        | Database Log                                   |
| DDPRS           | Dictionnary Logs                               |
| DOKCLU          | Solution Manager Session Information           |
| EDI40           | Control record (IDoc)                          |
| EDIDC           | Control record (IDoc)                          |
| EDIDS           | Control record (IDoc)                          |
| GVD_LATCHCHILDS | Oracle monitor                                 |
| GVD_SEGSTAT     | Oracle monitor                                 |
| OCSCMPLOBJ      | Complete Information for Objects               |
| REPOSRC         | ABAP Source code repository                    |
| RSBATCHCTRL     | BI Background Management                       |
| RSBATCHDATA     | BI Background Management                       |
| RSBATCHHEADER   | BI Background Management                       |
| RSBATCHPROT     | BI Background Management                       |
| RSBATCHSTACK    | BI Background Management                       |
| RSBERRORLOG     | DTP Error Log                                  |
| RSBKDATA        | Copy of INDX for DTP: Runtime Buffer           |
| RSBKSELECT      | Selections for DTP Request (Summary)           |
| RSBMLOGPAR      | Hierarchical Log: Field/Value Pair             |
| RSBMLOGPAR_DTP  | DTP Log: Field/Value Pairs                     |
| RSBMNODES       | Hierarchical Log: Nodes                        |
| RSBMONMESS      | Hierarchical Log: Table with Messages          |
| RSBMREQ_DTP     | DTP Error Log Related                          |
| RSDDSTATAGGRDEF | BW Statistics                                  |
| RSDDSTATDTP     | BW Statistics                                  |
| RSDDSTATEVDATA  | BW Statistics                                  |
| RSDDSTATHEADER  | BW Statistics                                  |
| RSDDSTATLOGGING | BW Statistics                                  |
| RSDDSTATWHM     | BW Statistics                                  |
| RSHIENODETMP    | Hierarchie Loading Log                         |
| RSIXWWW         | Web Reporting Component                        |
| RSLDTDONE       | Texts on the requested InfoPackages and groups |
| RSMONFACT       | Fact table monitor                             |
| RSMONIPTAB      | InfoPackage for the monitor                    |
| RSMONMESS       | Monitor Logs                                   |
| RSODSACTDATA    | DSO Field aggregation                          |
| RSODSACTUPDTYPE | DSO Field aggregation                          |
| RSPCINSTANCE    | PC Instance - Info on process chain instances  |
| RSPCPROCESSLOG  | Process Chain Log                              |

|                              |                                          |
|------------------------------|------------------------------------------|
| RSREQDONE                    | Monitor: Saving of the QM entries        |
| RSREQDPTID                   | Note TID for Request and Data Package    |
| RSRWBSTORE                   | Workbooks Storage                        |
| RSSELDONE                    | Monitor: Selections for executed request |
| WBCROSSGT                    | Lists of objects in ABAP programs        |
| WRH\$_ACTIVE_SESSION_HISTORY | Oracle system                            |
| WRH\$_EVENT_HISTOGRAM        | Oracle system                            |
| WRH\$_SQL_PLAN               | Oracle system                            |
| WRH\$_SYSMETRIC_HISTORY      | Oracle system                            |

## Table Reorg - Updating the size of the tables after clean up

When you delete data in tables, the tables size do not always change. This depends on the configuration of the table.

Usually if a table is dropped (ie. completely deleted, not just emptied) then the change will be reflected in DB02 the next day.

But in most cases, there is no change. It is necessary to do a "Re-organisation" of the table in order to reflect the change.

The BW team cannot do this re-org so it is necessary to request it to the SAP technical team.

## Before running the procedure

### Delete inactive user accounts

Before launching any of the following clean up actions, it is better if all the BW users accounts in production that have not been used for a long time (12 months - Excluding IT & non-dialog users) be deleted from the system. This is because in some cases, data cannot be deleted if the user still exists.

To check if user accounts are used, launch transaction RSUSR200.

### Take a snapshot of Database sizes before process

In order to be able after the process to verify the changes of sizes, you need to take a snapshot of the database sizes before running the process.

- 1 - Go to DB02
- 2 - Select the "Segments" and "Detailed Analysis" options
- 3 - Extract the list of top largest tables sizes and save it

## Meta data - PRODUCTION ONLY



### To be done in production systems only

All the metadata actions must only be done in production - This is simply due to the fact that it's normal that many ressources are not used in dev/simulation/quality.

| Main Parameter | Value              |
|----------------|--------------------|
| Last Use Date  | current date - 365 |

| Main tables |
|-------------|
| D010INC     |
| RSRWBSTORE  |
| RSSGTPDIR   |

## Delete un-used queries & workbooks

### Explanation

This program deletes queries that have not been used for a long time (365days). Although this is not very large in terms of size, it allows to delete obsolete reports that no longer need to be maintained and also allows removal of all the test queries.

We do not delete all un-used queries : please check the [specific page](#) for all the exceptions.

## How to

- Transaction : RSZDELETE
- Main Parameter : **Last Use Date < current date - 365**
- See specific page for this process : [Un-Used Query Deletion Process](#)

## Delete un-used Bex Web bookmarks


### Explanation

This is to remove bookmarks that result from Web templates in SAP NetWeaver 7.0 format.

## How to

1 - Go to transaction Se38

2 - Run program RSRD\_ADMIN\_BOOKMARKS\_3X (For old 3.x version bookmarks)

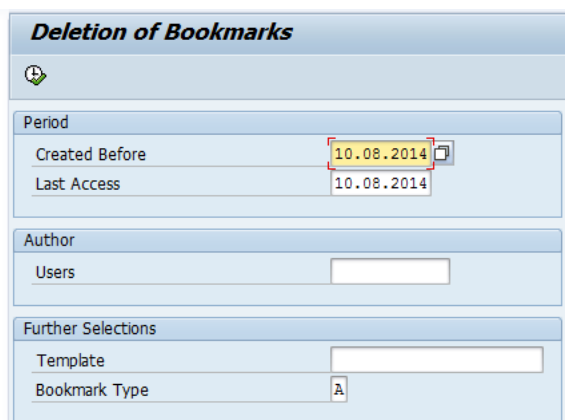

3 - Select All users. For Created Before/Last Access, put **Current Date - 365**

4 - Select All bookmarks and delete



#### Repeat

You need to repeat the select all + delete several times if necessary as the initial screen only shows a few bookmarks



#### V7 Bookmarks

RSRD\_ADMIN\_BOOKMARK S\_3X can only delete 3.x version bookmarks. Program RSWR\_BOOKMARK\_REORG can be used to delete 7.x bookmarks but the problem is that you cannot know if it's still in use - So it's not included in this process.

#### References

[Reorganization of Bookmarks](#)

## Delete Bex Broadcaster Bookmarks

### Explanation

Deleting bookmark IDs and view IDs that were created by the system for information broadcasting.

#### Temporary Bookmark IDs / View IDs

Bookmark IDs and view IDs that have been generated temporarily for the system to generate online links. The bookmark IDs or view IDs are no longer used in broadcast settings and do not form part of a URL for any sent online links.

#### Bookmark IDs / View IDs Used in Sent Links

Bookmark IDs and view IDs that are no longer being used in broadcast settings but have still been sent as a part of a URL for an online link. This means that the bookmark IDs and view IDs can only be deleted when they are no longer being used in a broadcast setting.

## How to

1 - Go to transaction SE38

| Main parameter        | Value   |
|-----------------------|---------|
| Temporary Bookmark ID | 365     |
| Older than (In days)  |         |
| Bookmark IDs          | 365     |
| Old than (In days)    |         |
| Test Call (No delete) | Uncheck |

#### References

[Reorganization of Bookmark IDs and View IDs](#)

2 - Run program RSRD\_BOOKMARK\_REORGANISATION

3 - Input "365" in Older Than Days

4 - Uncheck "Test Call (No Delete)" - Otherwise no real deletion will be done

**Reorganization of Bookmarks/ViewIDs**



**Temporary Bookmark ID/View ID**  
Bookmark IDs/ view IDs that were not sent in the broadcast settings or as part of the URL  
☒ Delete  
Older Than (in Days)

**Bookmark IDs/ View IDs Used in Links That Have Been Sent**  
Bookmark IDs/ view IDs that are no longer being used in the broadcast settings but have been sent as part of the URL  
☒ Reorganize  
Older Than (in Days)

☐ Test Call (No Delete)  
☒ Output Details

## Delete un-used workbooks & roles content

### Explanation

This program is used to delete from the workbook storage (RSRWBSTORE) all the workbooks that are still stored but are no longer referenced in any favorites or roles. This happens for example for all the workbooks in the favorites of a user account that was deleted.

Note that the program also checks the existing workbooks that have no queries in it. This can happen for workbooks that are in fact simple documentations via excel. That is why those are not deleted (see process below).

#### Main tables cleaned

RSRWBSTORE  
AGR\_HIER  
AGR\_HIERT  
RSRWORKBOOK  
SMEN\_BUFFC  
RSRWBINDEX  
RSRWBINDEXT

### How to

1 - Go to transaction SE38

2 - Run program RSWB\_ROLES\_REORG

3 - Choose "Only Examine BW Roles"

**Reorganization of Workbook and Role Storage**



☒ Search roles?  
☒ Search favorites?  
☒ Search workbooks?  
☐ Examine all roles?  
☒ Only examine BW roles?  
☐ Use role name?  
Role Name:

This report has several sections :

| Section                                          | Explanation                                                                  | Action               |
|--------------------------------------------------|------------------------------------------------------------------------------|----------------------|
| Incorrect References from Workbooks in Roles     | References from workbooks in roles that do not exist in workbook storage     | Delete all           |
| Workbooks without Query Assignment               | References to workbooks in roles that do not have a query assignment         | <b>DO NOT DELETE</b> |
| Incorrect References from Workbooks in Favorites | References from workbooks in favorites that do not exist in workbook storage | Delete all           |

|                                                                              |                                                                             |                      |
|------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------|
| References from workbooks in favorites that do not exist in workbook storage | References to workbooks in favorites that do not have a query assignment    | <b>DO NOT DELETE</b> |
| Unused Workbooks                                                             | Workbooks in workbook storage that are not referenced in roles or favorites | Delete all           |

## Delete un-used broadcast settings

- 1 - Go to RSRD\_ADMIN
- 2 - Click on Settings
- 3 - Remove any values in Created By.
- 4 - In Last Executed On, select 01.01.2000 to Current Date - 365

**Selection of Broadcast Settings**

General Parameters

Technical Name:  to

Description (Search String):

Object Version:

Created By:

Last Changed by:  to

Created On:  / 00:00 To  / 00:00

Last Changed On:  / 00:00 To  / 00:00

Last Executed on:  01.01.2000 / 00:00 To  13.08.2014 / 00:00

- 5 - Select the settings & delete

**Selected Broadcast Settings**

| Broadcast Setting        | CreateTime | Changed by | Changed On | Chng Time | Use Date   | Use Time |
|--------------------------|------------|------------|------------|-----------|------------|----------|
| WC_NOV_VWV_EUR           | 15:47:06   | BW_BCAST   | 13.10.2010 | 10:44:25  | 16.11.2009 | 09:42:51 |
| BCAST_LA_CF_002          | 21:39:28   | LANDRADE   | 02.12.2009 | 21:39:28  | 07.01.2010 | 08:01:48 |
| BCAST_LA_CF_005          | 21:57:35   | LANDRADE   | 02.12.2009 | 21:59:33  |            | 08:01:48 |
| BCAST_LA_CF_007          | 22:07:41   | LANDRADE   | 02.12.2009 | 22:08:57  |            | 08:04:40 |
| BCAST_LA_CF_009          | 22:14:43   | LANDRADE   | 02.12.2009 | 22:16:58  |            | 08:12:01 |
| KK22 LA MONTHLY DOCOLLAB | 22:17:25   | BW_BCAST   | 04.02.2010 | 22:17:25  | 05.02.2010 | 10:00:37 |

## Statistics

### Delete Temporary Tables - Optional

#### Explanation



#### When to do

This operation should only be done if temporary tables are taking a lot of space. Check in DB02 all tables starting with "/BI0/0"

The BW System uses different temporary objects for queries and other processes.

- o /BI0/01\* Temporary Table
- o /BI0/02\* External hierarchies
- o /BI0/03\* Not used any longer.
- o /BI0/04\* Only relevant for BW3x: 04 are names of stored procedures
- o /BI0/05\* Names of triggers that are used while the system compresses requests
- o /BI0/06\* Reuse temporary
- o /BI0/0D\* Tables that are used by open hub functionality
- o /BI0/0P\* Tables used during optimized preprocessing

#### How to

- 1 - Go transaction Se38
- 2 - Run program SAP\_DROP\_TMPTABLES

| Main parameter   | Value                            |
|------------------|----------------------------------|
| Last Executed On | 01.01.2000 to Current Date - 365 |

| Main tables cleaned |
|---------------------|
| /BI0/0*             |

| References                                    |
|-----------------------------------------------|
| <a href="#">SAP_DROP_TMPTABLES</a>            |
| <a href="#">BW temporary database objects</a> |
| SAP Note 1106393                              |

**Removes temporary database objects**

**Caution**  
This Report Deletes Temporary Objects  
If any objects are still in use, crucial processes may terminate  
See SAP Note 449891

The following objects need to be deleted:  
☒ Temporary Tables (Type 01/0P)  
☐ Temporary Views (Type 03/07)  
☐ Temp. Hierarchy Table (02/08)  
☐ Temporary SID Tables (06)  
☐ Generated (Temporary) Reports  
☐ CRMSEGM  
☐ TMPIDX  
☐ TMPCS  
☐ TREXALL

## Deleting DTP Error Log

### How to

The DTP error log can be analysed via program RSB\_ANALYZE\_ERRORLOG.

To delete the DTP error log :

- 1 - Go to transaction SE38
- 2 - Run program RSBM\_ERRORLOG\_DELETE
- 3 - Input "30 days" in the "but always older than ... days" parameter
- 4 - Check "Delete log"
- 5 - Run - If large, run in Background

**Report RSBM\_ERRORLOG\_DELETE**

Start Date  to    
DTP  to    
but always older than ... days   
☒ Delete Log

## Deletion of BW Statistics

**Please don't implement the deletion of BW statistics for PQ2 till new communication from Techno BI team.**

- 1 - Go to transaction SE38
- 2 - Run program RSDDSTAT\_DATA\_DELETE
- 3 - Select all checkboxes for data to be deleted
- 4 - Free Date selection : Current Date - 365

[blocked URL](#)

5 - In the Date up until which data is to be deleted, select "Date Selection" and then enter Current date - 365 in the "Up to Day (Incl.)" field.

6 - Today, we applied the oss note 891740 - Query runtime statistics: Corrections for extractors / in the table RSADMIN : TCT\_KEEP\_OLAP\_DM\_DATA\_N\_DAYS = 730 (so 730 days to avoid the issue done in the past, deletion of infocube and not more possible to retrieve the data)

| Main parameter                 | Value   |
|--------------------------------|---------|
| but always older than ... days | 30      |
| delete log                     | Checked |

| Main tables cleaned        |
|----------------------------|
| RSBERRORLOG<br>(+ indexes) |

| References       |
|------------------|
| SAP Note 1139396 |
| SAP Note 1106393 |

| Main parameter  | Value              |
|-----------------|--------------------|
| Up to day (Inc) | Current Date - 365 |

| Main tables cleaned                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------|
| All RSDDSTAT* :                                                                                                            |
| RSDDSTATLOGGING<br>RSDDSTATDTP<br>RSDDSTATAGGRDEF<br>RSDDSTATEVDATA<br>RSDDSTATHEADER<br>RSDDSTATAGGRDEF<br><br>(+Indexes) |


**Corresponding tables cleaned by option :**

## 891740 - Query runtime statistics: Corrections for extractors

| Option                                 | Tables                                                                                 |
|----------------------------------------|----------------------------------------------------------------------------------------|
| Query Statistics Tables                | RSDDSTATHEADER,<br>RSDDSTATDM,<br>RSDDSTATEVDATA,<br>RSDDSTATAGGRDEF,<br>RSDDSTATINFO. |
| Statistic Loggin Tables                | RSDDSTATLOGGING                                                                        |
| Aggregates/BIA Index Process           | RSDDSTATAGGR,<br>RSDDSTATTREXSERV,<br>RSDDSTATTREX,                                    |
| InfoCube Statistics (Delete, Compress) | RSDDSTATDELE,<br>RSDDSTATCOND                                                          |

### Delete RSBATCH

1. Go to transaction SE38 (tcode: RSBATCH)
2. Run program RSBATCH\_DIALOG and select on 'Deletion Selections'

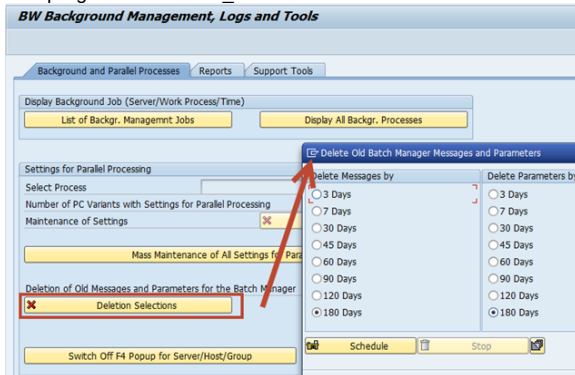

3. Select 60 Days and schedule as background mode.

| Main tables cleaned |
|---------------------|
| RSBATCHDATA         |
| RSBATCHHEADER       |
| RSBATCHCTRL         |

### Delete RSST logs

- 1 - Go to transaction SE38
- 2 - Run program RSTT\_TRACE\_DELETE

**Report RSTT\_TRACE\_DELETE**

Trace Selection for Trace ID and Up-to-Datensess

|                            |        |    |  |
|----------------------------|--------|----|--|
| Trace ID                   | *      | to |  |
| Author of Trace            | *      | to |  |
| Application Area           | BW_BEX |    |  |
| Ignore Number of Last Days | 100    |    |  |

| Main parameter             | Value  |
|----------------------------|--------|
| Ignore Number of Last Days | 100    |
| Application Area           | BW_BEX |

| Main tables cleaned |
|---------------------|
| RSTT_CALLSTACK      |
| RSTT_TRACE          |

### Clean DYNPSOURCE table

WBP

- 1 - Go to transaction SE38
- 2 - Run program RSDQ\_DYNP\_GP\_CLEANUP
- 3 - Check the PDOIT
- 4 - Execute the program

[blocked URL](#)

| Main tables cleaned          |
|------------------------------|
| DYNPSOURCE                   |
| + corresponding LOB segments |

PQ1

1 - Go to transaction SE38

2 - Run program ZSAP\_TEMPOREP\_CLEANUP

3 - Check the PDOIT

4 - Execute the program



## Delete Sent Documents - Hidden documents

1 - Go to transaction SE38

2 - Run program RSSODFRE

3 - Select Minimum Age (Days) = 60

4 - Check the 2 delete boxes

5 - Uncheck Test Mode

6 - Execute the program

[blocked URL](#)

[blocked URL](#)

| Main parameter          | Value     |
|-------------------------|-----------|
| Minimum Age (Days)      | 30        |
| Test Mode               | Unchecked |
| Delete documents linked | Checked   |
| Delete unsent documents | Checked   |

| Main tables cleaned |
|---------------------|
| SOFFCONT1           |
| BCST_CAM            |
| BCST_RE             |
| BCST_SR             |
| SOC3                |
| SOCs                |
| SOES                |
| SOFM                |
| SOOD                |
| SOOS                |
| SOST                |

## Delete Sent Documents - Private Documents

1 - Go to transaction Se38

2 - Run program : RSSO\_DELETE\_PRIVATE

3 - Select all types of messages (Inbox to Private Trash)

4 - For Inbox, check "All" instead of "Viewed"

5 - Uncheck Test Mode

6 - Run the program

[blocked URL](#)

| Main parameter          | Value     |
|-------------------------|-----------|
| Minimum Age (Days)      | 60        |
| Inbox                   | All       |
| Test Mode               | Unchecked |
| Delete unsent documents | Checked   |

## Reorg Documents & Sent requests

- 1 - Go to SE38
- 2 - Run program RBCS\_REORG
- 3 - Select "Specify Age (in Days)" and select from 60 to 9999.
- 4 - Uncheck the "Test Mode"

**BCS Reorganization of Documents and Send Requests**

Reorganization Mode

- ☒ Reorganize documents with send requests
- ☒ Reorganize documents that do not have send requests

Selection Period

☐ Specify Creation Date

☒ Specify Age (in Days)

Age in Days: 60 to 9999

Date created: 11.08.2015 to

| Main parameter | Value      |
|----------------|------------|
| Age in days    | 60 to 9999 |
| Test Mode      | Unchecked  |

## Deletion of Log Files - PC Instances

- 1 - Go to SE38
- 2 - Run program RSPC\_INSTANCE\_CLEANUP
- 3 - In Older than : current date - 365

**Report RSPC\_INSTANCE\_CLEANUP**

Older than: 11.08.2014

☐ Without Correspond. Chain Run

☒ Delete Logs

| Main parameter | Value              |
|----------------|--------------------|
| Older Than     | Current Date - 365 |
| Delete Logs    | Checked            |

| Main tables cleaned |
|---------------------|
| RSPCINSTANCE        |
| RSPCINSTANCET       |

## Deletion of Log FILES - Process Chain Log

- 1 - Go to SE38
- 2 - Run program RSPC\_LOG\_DELETE
- 3 - In the "Up to and including date" enter current date - 365

**Deletion of Process Chain Logs and Assigned Process Logs**

Date Selection

Process Chain (ID):

Delete from date:

up to and including date: 11.08.2014

Log-ID of a Process Chain Run:

☐ Ignore Errors

| Main parameter           | Value              |
|--------------------------|--------------------|
| Up to and including date | Current Date - 365 |

| Main tables cleaned |
|---------------------|
| RSPCLOGCHAIN        |
| RSPCPROCESSLOG      |
| RSPCCHAINATTR       |

## Deletion of Log Files - Job Status

 **Already scheduled**  
This is already scheduled automatically (at least on WBP)

| Main tables cleaned |
|---------------------|
| TBTCO               |

- 1 - Go to SE38
- 2 - Run program RSBTCDEL2
- 3 - Run with default values and "Test Run" unchecked

| Differentiation Specifications of Jobs |  |  |   |
|----------------------------------------|--|--|---|
| Job Name                               |  |  | → |
| User Name                              |  |  | → |
| Event                                  |  |  | → |
| Event Parameter                        |  |  | → |

| Statuses, Classes, and Time Specifications |                                     |                   |    |
|--------------------------------------------|-------------------------------------|-------------------|----|
|                                            |                                     | Job Class:        |    |
|                                            |                                     | A                 | B  |
| Released                                   | <input type="checkbox"/>            | Older Than (Days) | 14 |
| Scheduled                                  | <input type="checkbox"/>            | Older Than (Days) | 14 |
| Finished                                   | <input checked="" type="checkbox"/> | Older Than (Days) | 14 |
| Canceled                                   | <input checked="" type="checkbox"/> | Older Than (Days) | 14 |

| Performance Optimization         |                          |
|----------------------------------|--------------------------|
| Commit                           | 1,000                    |
| Do Not Delete Temporary Variants | <input type="checkbox"/> |

## Deletion of Log Files - Application logs

- 1 - Go to transaction SE38
- 2 - Run program SBAL\_DELETE
- 3 - Select Expiry Date "and logs which can be deleted before the expiry date"
- 4 - In from (date/time) to (date/time) select "01.01.1900" and current date - 730 days

| <b>Application Log: Delete Expired Logs</b>                                                                                                                   |            |    |          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----|----------|
|                                                                            |            |    |          |
| <b>Delete logs</b>                                                                                                                                            |            |    |          |
| All logs are deleted which satisfy the following selection conditions, and for which:                                                                         |            |    |          |
| <ul style="list-style-type: none"> <li>- the expiry date is reached or passed</li> <li>- the expiry date is not defined</li> </ul>                            |            |    |          |
| <b>Expiry date</b>                                                                                                                                            |            |    |          |
| <input type="radio"/> Only logs which have reached their expiry date<br><input checked="" type="radio"/> and logs which can be deleted before the expiry date |            |    |          |
| <b>Selection conditions</b>                                                                                                                                   |            |    |          |
| Object                                                                                                                                                        |            | to |          |
| Subobject                                                                                                                                                     |            | to |          |
| External ID                                                                                                                                                   |            | to |          |
| Transaction code                                                                                                                                              |            | to |          |
| User                                                                                                                                                          |            | to |          |
| Log number                                                                                                                                                    |            | to |          |
| Problem class                                                                                                                                                 |            | to |          |
| from (date/time)                                                                                                                                              | 01.01.1900 |    | 00:00:00 |
| to (date/time)                                                                                                                                                | 11.08.2014 |    | 00:00:00 |

| Main parameter    | Value                                                |
|-------------------|------------------------------------------------------|
| Expiry Date       | and logs which can be deleted before the expiry date |
| from (date /time) | 01.01.1900                                           |
| to (date /time)   | current date - 730 days                              |

| Main tables cleaned |
|---------------------|
| BALHDR              |
| BALDAT              |

## Delete Idocs

| Main tables cleaned |
|---------------------|
|---------------------|

1 - Go to SE38

2 - Run program RSETESTD

EDI40

EDIDC

EDIDS

### Authorization

The BW team doesn't have the access to run this report - It is necessary to request it from the SAP Technical Team

## Deletion of Change Log

### How to check the biggest table of Change Log

1. Go to Tcode DB02

Select Space --> Additional Function --> BW Analysis. The overall size of change log will be display like picture below.

| BW Area         | BW Object Type | Details        | # BW Objects | # Root Objects | # Partitions | Size(MB)      | Exports | Blocks      |
|-----------------|----------------|----------------|--------------|----------------|--------------|---------------|---------|-------------|
| ODS & Changelog | Changelog      | Active data    | 585          | 1,180          | 2,648        | 22,424,498    | 256,915 | 92,604,712  |
| ODS & Changelog | ODS            | New data       | 631          | 1,096          | 0            | 2,361,227,834 | 163,138 | 268,675,144 |
| PSA             | PSA            | PSA            | 1,065        | 2,580          | 4,411        | 512,494,728   | 294,380 | 65,599,232  |
| Temporary       | Temporary      | Ext. hierarchy | 278          | 340            | 0            | 84,636        | 1,662   | 12,086      |


2. Double click on ODS & Changelog line to display detail of each DSO. Sort the size in order to see the biggest table.

| Owner  | BW Object        | BW Area         | BW Object Type | Details     | Size[Mb]    |
|--------|------------------|-----------------|----------------|-------------|-------------|
| SAPSR3 | /BIC/AODSFIGL100 | ODS & Changelog | ODS            | Active data | 196,366.875 |
| SAPSR3 | /BIC/AODSFIGL300 | ODS & Changelog | ODS            | Active data | 192,494.375 |
| SAPSR3 | /BIC/AODS_OPA600 | ODS & Changelog | ODS            | Active data | 186,937.000 |
| SAPSR3 | /BIC/ADPFGL0200  | ODS & Changelog | ODS            | Active data | 153,768.000 |
| SAPSR3 | /BIC/AODS_IC0100 | ODS & Changelog | ODS            | Active data | 129,468.813 |
| SAPSR3 | /BIC/AARC_IC0100 | ODS & Changelog | ODS            | Active data | 76,721.500  |

3. Then, go to check on the flow in process chain. In order to delete the changelog, it has to be deleted by process chain.

### How to Delete Change Log

1. Add object 'Deletion of Requests from process chain

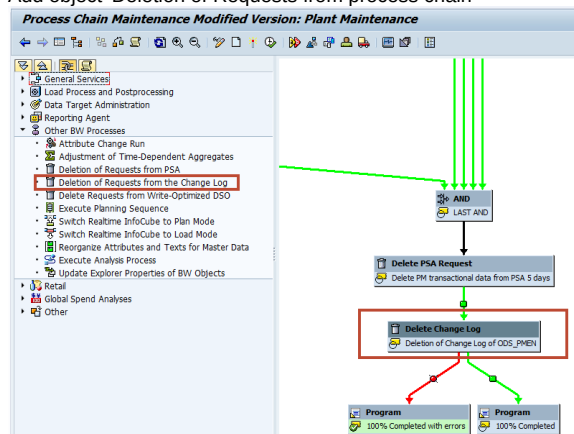

2. Enter parameter for each DSO including in the process chain. The time should be 14 days. It can be 0 if the DSO is loaded by full

3. Run the Changelog deletion task twice.

- One with the "Delete Activation Requests Only, no Load Requests"
- Process Display: Deletion of Requests from the Change Log**
- Variant: DEL\_CHGLOG\_ODS\_PMEN Deletion of Change Log of ODS\_PMEN
- Last Changed By: SHCHUA Changed On: 08.09.2014 At: 14:41:55
- Selection Pattern for Pattern-Based Deletion
- |                          | DataStore Object | InfoArea      | Older Than |                          |                          |                          |                                     |
|--------------------------|------------------|---------------|------------|--------------------------|--------------------------|--------------------------|-------------------------------------|
| <input type="checkbox"/> | ODS_FM03         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | ODS_FM04         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| <input type="checkbox"/> | ODS_FM11         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | ODS_FMEN         | AREA_FM_OMOPA | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | DSO_FM12         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

- Process Display: Deletion of Requests from the Change Log**
- Variant: DEL\_CHGLOG\_ODS\_PMEN Deletion of Change Log of ODS\_PMEN
- Last Changed By: SHCHUA Changed On: 08.09.2014 At: 14:41:55
- Selection Pattern for Pattern-Based Deletion
- |                          | DataStore Object | InfoArea      | Older Than |                          |                          |                          |                          |
|--------------------------|------------------|---------------|------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> | ODS_FM03         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | ODS_FM04         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | ODS_FM11         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | ODS_PMEN         | AREA_FM_OMOPA | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | DSO_FM12         | AREA_FM_OPER  | 5          | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |


- The best practice is modified process chain in development system
- Deletion of changelog should be at the end of process chain.
- Check the big table of changelog once a year and if missing process is found, modify the process chain by adding the deletion of PSA

## References: Note 1455417

There is an error popup when go to display process chain. The system will display error message "Variant \* does not exist" occurs when you try to execute a process chain. This happens especially after a system copy or transport.



1. It needs to delete incorrect job of PC by using program RS\_FIND\_JOBS\_WITHOUT\_VARIANT
2. **Check:** Mark on find PC jobs and Scheduled jobs (remove mark, if we want to delete incorrect job that is not scheduled)

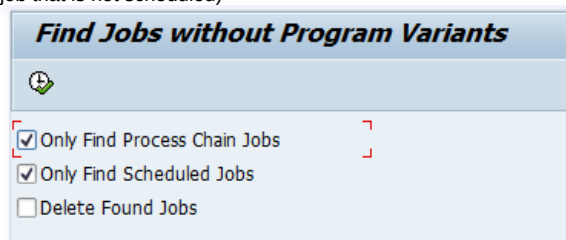

- [illegible]

# Business Data

## Delete empty, un-used partitions for cubes

For each of the largest partitioned cubes, this can be run to delete useless partitions. This is particularly important after data was deleted from the cubes.

- 1 - Go to SE38 transaction
- 2 - Run program SAP\_DROP\_EMPTY\_FPARTITIONS
- 3 - Input in CUBENAME the name of the cube you want to clean
- 4 - Execute once with the "Show Option"

***Locate/remove unused or empty partitions of an F-fact table***

Choose Infocube

CUBENAME

☒ SHOW  
☐ DEL\_CNT  
☐ DEL\_DIM  
☐ DO\_DROP

- 5 - Check the result of the analysis

```
1.602 partitions may be dropped.
1.602 partitions with DEL_CNT.
0 partitions with DEL_DIM.

Partitions with a requid of -1 may be dropped.
They do not have an entry in the p-dimension
and will thus not be used for reporting.

Partitions with a count of 0 may be dropped.
They contain no data and will not be reused.
```

- 6 - Depending on the result, re-execute the program with "DO\_DROP" checked and either "DEL\_CNT" or "DEL\_DIM"

***Locate/remove unused or empty partitions of an F-fact table***

Choose Infocube

CUBENAME

☐ SHOW  
☒ DEL\_CNT  
☐ DEL\_DIM  
☒ DO\_DROP


# Deletion of unused dimension entries

How to

As this program run's individually for each infocube, it cannot be launched for all. You need to identify the info-providers with the largest table dimensions and then apply the program to those cubes.

1 - Go to DB02

2 - Double click on "BW Analysis" on the left menu :

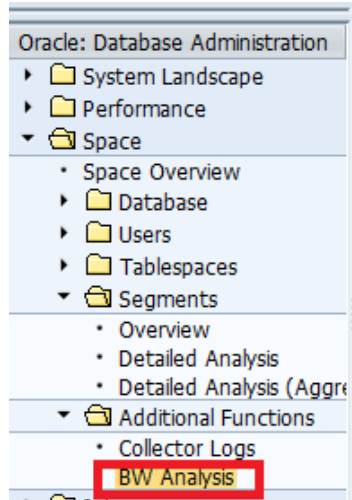

3 - Double click on the "Cubes & related objects - Dimension" line

| BW Area                 | BW Object Type | Details   | # BW Objects | # Ro |
|-------------------------|----------------|-----------|--------------|------|
| BW master data          | SID            |           | 3,700        |      |
| BW master data          | Texts          |           | 839          |      |
| Cubes & related objects |                |           | 3,156        |      |
| Cubes & related objects | Aggregate      | Aggr. DIM | 3            |      |
| Cubes & related objects | Aggregate      | E fact    | 3            |      |
| Cubes & related objects | Aggregate      | F fact    | 1            |      |
| Cubes & related objects | Dimension      |           | 2,795        |      |
| Cubes & related objects | Infocube       | E fact    | 127          |      |
| Cubes & related objects | Infocube       | F fact    | 223          |      |

4 - Sort the results by "Size". This provides the largest dimensions in BW. You can then run the program on those infocubes.

| Owner  | BW Object        | BW Area                 | BW Object Type | Details | Size[M...  |
|--------|------------------|-------------------------|----------------|---------|------------|
| SAPSR3 | /BIC/DCUB_QM032  | Cubes & related objects | Dimension      |         | 6,997.3... |
| SAPSR3 | /BIC/DCUB_FIAP17 | Cubes & related objects | Dimension      |         | 6,880.0... |
| SAPSR3 | /BIC/DCUB_PP028  | Cubes & related objects | Dimension      |         | 6,150.5... |
| SAPSR3 | /BIC/DCUB_PP018  | Cubes & related objects | Dimension      |         | 5,287.2... |
| SAPSR3 | /BIC/DCUB_PUR076 | Cubes & related objects | Dimension      |         | 5,060.7... |
| SAPSR3 | /BIC/DCUB_PM083  | Cubes & related objects | Dimension      |         | 4,640.5... |
| SAPSR3 | /BIC/DCUB_PUR080 | Cubes & related objects | Dimension      |         | 4,125.4... |
| SAPSR3 | /BIC/DCUB_PUR016 | Cubes & related objects | Dimension      |         | 3,917.3... |
| SAPSR3 | /BIC/DCUB_PUR014 | Cubes & related objects | Dimension      |         | 3,774.9... |

5 - Go to transaction RSRV

6 - Select the test "Unused entries in InfoCube dimension" and double click to add it to the tests to run


[blocked URL](#)

7 - Double click on the right side "Unused entries in InfoCube dimension" and enter the name of the infocube you want to clean

8 - Click on Execute

## References



2197654 - BW Data Extraction - Important house keeping activity in BW system



### Function Module

Note that function module RSDDCVER\_DIM\_UNUSED can also be used for this. But it will not provide any logs.


9 - Once the check is finished, go back, select the test line (on the right) and then "Correct Error" - Then select YES for Carry out Repairs.

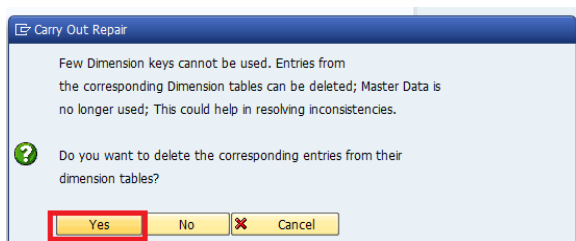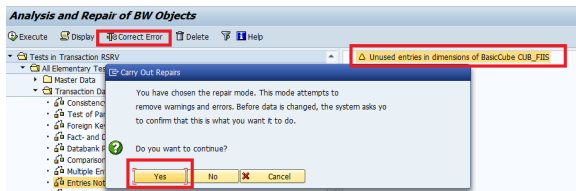

## Deletion of Aggregates

1 - Go to RSA1 transaction

2 - In the left menu, click on Administration --> Monitors --> Aggregates

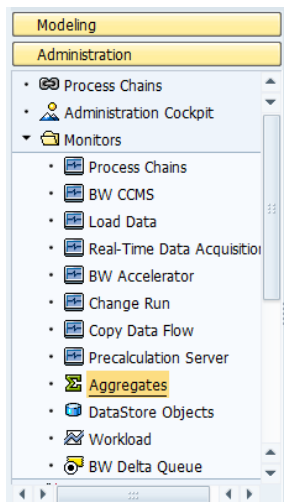

3 - Analyse each aggregate to see if it is useful

| Aggregate Status     | Status | Filled / S... | Valuation | Records | Records Summmari... | Usage | Last Used   |
|----------------------|--------|---------------|-----------|---------|---------------------|-------|-------------|
| Controlling - Actual |        |               |           |         |                     |       |             |
| AGG_PS002_001        |        |               | -----     | 2086966 | 12                  | 31    | 05.08.20... |
| STAT 18              |        |               | -----     |         |                     | 0     |             |


To know if the aggregate can be deleted :

1. If the cube is already in BI Accelerator --> Delete the aggregate as BI Accelerator is used first.
2. If the valuation of the aggregate is not positive (Ex : |+++ ) then it means it doesn't improve the execution time --> Delete the aggregate
3. If the number of "Usage" is very low considering the time since the aggregate creation --> Delete the aggregate since it's not used much


4 - To delete the aggregate, for each cube selected, go to RSA1

5 - Select the cube and right click --> Manage

6 - Go to the Rollup tab and click on "Aggregates"

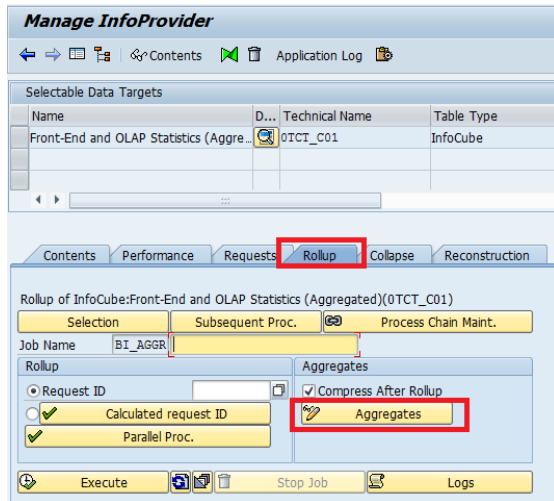

7 - Select the aggregate, right click and delete

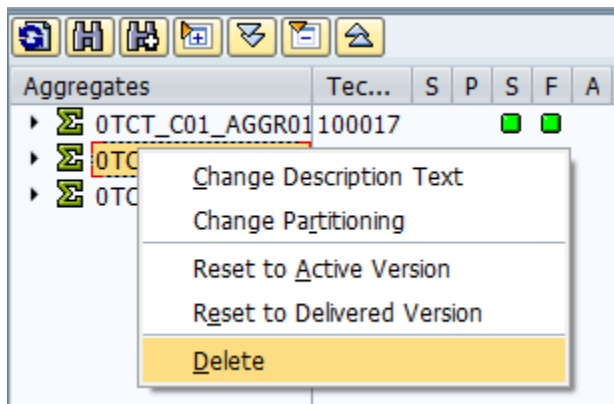

## Deletion of PSA

### How to check the biggest table of PSA

1. Go to Tcode DB02
2. Select Space --> Additional Function --> BW Analysis. The overall size of PSA will be display like picture below.

| Area      | Object Type | Details         | # BW Objects | # Root Objects | # Partitions | Size(MB)      | Extents | Blocks      |
|-----------|-------------|-----------------|--------------|----------------|--------------|---------------|---------|-------------|
| PSA       | PSA         | Active data     | 631          | 1,599          | 0            | 2,341,227,824 | 553,156 | 209,677,444 |
| PSA       | PSA         | New data        | 538          | 1,076          | 0            | 535,029       | 1,637   | 68,416      |
| PSA       | PSA         | PSA             | 1,069        | 2,280          | 4,411        | 212,594,720   | 295,380 | 65,599,232  |
| PSA       | PSA         | PSA             | 1,069        | 2,280          | 4,411        | 212,594,720   | 295,380 | 65,599,232  |
| Temporary | Temporary   | Ext. hierarchy  | 276          | 340            | 0            | 84,436        | 1,062   | 12,096      |
| Temporary | Temporary   | Ext. hierarchy  | 5            | 10             | 0            | 14,509        | 127     | 1,856       |
| Temporary | Temporary   | Reuse temporary | 162          | 162            | 0            | 31,872        | 301     | 3,968       |
| Temporary | Temporary   | Temporary table | 111          | 108            | 0            | 49,867        | 864     | 6,272       |

## References

[How to Delete Error PSA](#)

- Double click on PSA line to display detail of each datasource. Sort the size in order to see the biggest table.

| Owner  | BW Object        | BW Area | BW Object Type | Details | Size(Mb)   | Extents | Blocks     |
|--------|------------------|---------|----------------|---------|------------|---------|------------|
| SAPSR3 | /BIC/B0003001000 | PSA     | PSA            |         | 71,113.000 | 35,433  | 9,102,4... |
| SAPSR3 | /BIC/B0005491000 | PSA     | PSA            |         | 49,468.000 | 17,845  | 6,331,9... |
| SAPSR3 | /BIC/B0000498000 | PSA     | PSA            |         | 35,903.000 | 18,547  | 4,595,5... |
| SAPSR3 | /BIC/B0006586000 | PSA     | PSA            |         | 30,070.000 | 17,509  | 3,848,9... |
| SAPSR3 | /BIC/B0005918000 | PSA     | PSA            |         | 25,508.000 | 11,484  | 3,265,0... |
| SAPSR3 | /BIC/B0000808000 | PSA     | PSA            |         | 24,135.252 | 14,667  | 3,089,3... |


- To find the name of datasource. Go to SE16 - RSTSODS and enter BW Object from DB02 into Technical ODS Name. Execute it, the name of datasource will be display

| Technical ODS Name | Object Name        | VERSION |                          |
|--------------------|--------------------|---------|--------------------------|
| /BIC/B0003001000   | DTS_CCRCT_EHS_COMP | WP1_400 | <input type="checkbox"/> |
| /BIC/B0005491000   | DTS_BW_COEPD       | PF1_020 | <input type="checkbox"/> |
| /BIC/B0005918000   | DTS_BW_AGREEMENT   | PF1_020 | <input type="checkbox"/> |
| /BIC/B0006586000   | 0NOTIFICATN_TEXT   | PF1_020 | <input type="checkbox"/> |
| /BIC/B0000498000   | 0NOTIFICATN_TEXT   | WP1_400 | <input type="checkbox"/> |

- Then, go to check on the flow in process chain. In order to delete the PSA, it has to be deleted by process chain.

## How to Delete PSA

- Add object 'Deletion of Requests from PSA'

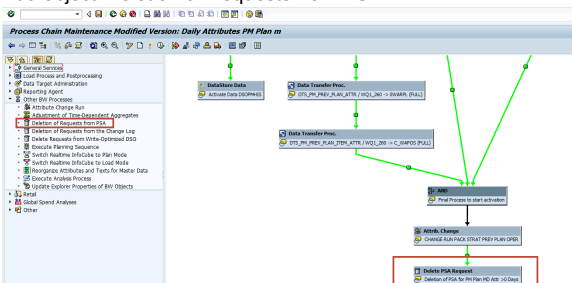

- Enter parameter for each data source  
The time should be:
  - Delta loading is 14 days
  - Full load is 14 days (normally 1 day is enough but to easier maintain to know each load is full or delta, we can delete after 14 day)

**Process Maintenance: Deletion of Requests from PSA**

Variant: RSV\_PSA\_DEL\_PM\_PLAN\_MD\_ATTR    ☐ Deletion of PSA for PM Plan MD Attr > 0 Days

Last Changed By: SHCHUA    Changed On: 27.11.2013    At: 10:37:46

Selection Pattern for Pattern-Based Deletion

| DataSource                                          | Src.system | Older Tha... |                          |                          |                          |
|-----------------------------------------------------|------------|--------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> DTS_PM_PREV_PLAN_ITEM_ATTR | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_PREV_PLAN_ITEM_TXT  | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_PREV_PLAN_TEXT      | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_PREV_PLAN_ATTR      | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_TASK_LIST_OPER_ATTR | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_TASK_LIST_OPER_TEXT | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_MAIN_PLAN_PACK_ATTR | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_PACKAGE_TEXT        | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_MAINPLAN_HIST       | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> DTS_PM_MAINPLAN_HIST       | WP1_400    | 1            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Note:

- The best practice is modified process chain in development system
- Deletion of PSA should be at the end of process chain.
- Check the big PSA once a year and if missing process is found, modify the process chain

## Delete un-necessary ODS Secondary Indexes

### Explanation

By default each ODS has a main index on it's key. Secondary index can be created (via RSA1 in the ODS) on top of the main index to boost performances in some cases. It is necessary to check if the existing indexes are useful as those :

- Take a lot of storage space
- Slow down the data loadings (each time a row is inserted, index has to be modified)
- Can slow down the performances if too many indexes that are too similar are created

There are several reasons existing indexes can no longer be useful :

- Index was not created on the ODS intentionally : the ODS was created via copy of another ODS which had this index.
- The ABAP code that was using the index was changed (fields removed or added)
- The Queries that used this index no longer exist or have been changed.
- Another index was created that overlaps.



#### Copy of ODS

When you copy an ODS, the indexes are also copied ! Think about remove them if not needed in the new ODS.

It is most of the time useless to create indexes with fields that are already all in the ODS KEY

Secondary indexes improve performances in a few cases :

#### Secondary Indexes improve performances when :

- ABAP Lookup : If you have a SELECT statement in an abap code where the "WHERE" has filters on the exact fields in the index (or less)
- If there is a direct selection on the infopackage/dts on those fields exactly.
- If field is used as key for infoaset (Although infosets should be avoided)
- If used as a filter in a query that is either directly on the DSO, or a MPR/Infoaset using the DSO.
- On a single info-object if it's necessary for a variable to display the ODS values only.

### How to


#### First step is to find the largest secondary indexes

1 - Go to transaction DB02

2 - Select Detailed Analysis

### References

[How to Create Secondary Index on DSO's in SAP BW/BI 7.x](#)

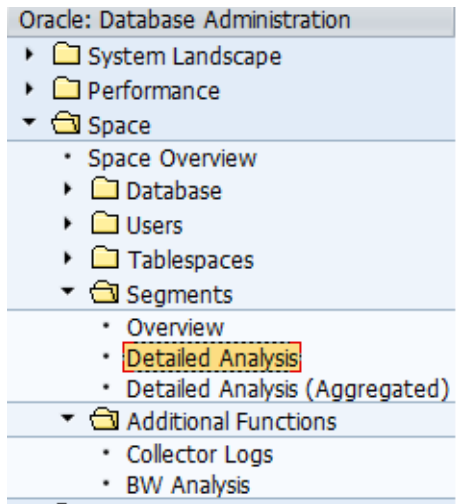

3 - Input the following values (<> \*0 will exclude the primary indexes).

4 - Sort by size(MB). You now have the list of the largest secondary indexes in the system

| Owner  | Segment           | Partiti... | Type  | Tablespace | Header File | Header Block | Size(MB)   |
|--------|-------------------|------------|-------|------------|-------------|--------------|------------|
| SAPSR3 | /BIC/AODSFGL30001 |            | INDEX | PSAPSR3ODS | 102         | 1,944,609    | 29,514.000 |
| SAPSR3 | /BIC/AODSFGL10002 |            | INDEX | PSAPSR3ODS | 86          | 1,152,033    | 22,019.000 |
| SAPSR3 | /BIC/AODSFGL30003 |            | INDEX | PSAPSR3ODS | 72          | 2,211,489    | 16,001.000 |

Now for each of the large Secondary Indexes, you need to check if it is still useful.

### Checking what is in the index

- 1 - Go to RSA1 transaction
- 2 - Select the DSO/ODS, right click and display
- 3 - You can see in the "Index" group the existing indexes and which characteristics are included

| DataStore Object                  | Techn. name / val... | F... |
|-----------------------------------|----------------------|------|
| FIGL: Line Items by Profit Centre | ODSFIGL3             |      |
| Object Information                |                      |      |
| • Version                         | ◇ In Process         |      |
| • Save                            | ⊕ Saved              |      |
| • Revised Version                 | ≡ Active Version     |      |
| • Object Status                   | ⓘ Active, executable |      |
| Settings                          |                      |      |
| • Key fields                      |                      |      |
| • Data Fields                     |                      |      |
| • Navigation Attributes           |                      |      |
| Indexes                           |                      |      |
| • 010 (non-unique)                |                      |      |
| • Company code                    | 0COMP_CODE           |      |
| • Chart of accounts               | 0CHRT_ACCTS          |      |
| • G/L Account                     | 0GL_ACCOUNT          |      |
| • Fiscal year / period            | 0FISCPER             |      |
| • Accounting document number      | 0AC_DOC_NO           |      |
| • Number of line item within acco | 0ITEM_NUM            |      |
| • Fiscal year variant             | 0FISCVARNT           |      |
| • 020 (non-unique)                |                      |      |
| • 030 (non-unique)                |                      |      |

### Checking if the index is still useful

Now that you know what is inside the index, you need to conduct several checks to see if it is useful.

**If any of these conditions is fulfilled then do not delete the index :**

1. Check that the index is not completely included in the ODS Key. The index is not useful if it's all included in the ODS key as there is already the primary index.
2. Check if the index is used in a query. The query must have a **FILTER** or **VARIABLE** on the index characteristics. The query could be :
  - a. Directly in the ODS --> Check using query designer.
  - b. In a multiprovider on top of the ODS --> Check using query designer.
3. Check if the index is used as the **join KEY for an infotset**
4. Check if there is an ABAP program that does a **select on the ODS table with "WHERE" conditions that all exist in the index.**
5. Check if there is an **infopackage/dts which selects on fields from the index** - In this case, if the ODS is very large, it could speed up the loading.

If none of these conditions are fulfilled, then the ODS Secondary Index can be deleted.

You can delete it from the RSA1 ODS modification view.

Note that a transport order is needed.

## Delete un-used & obsolete infoproviders & info-objects

Info-providers and info-objects that are no longer useful should be deleted.

In this case, **it is necessary to request approval from the object owner :**

- Reporting CC Manager if technical object
- Reporting coordinator of the relevant process for other objects

One way of identifying the obsolete objects is to check the date of last loading.

## Database re-organisations

In many cases, removing data from a table will not decrease the table size, nor the tablespace size, nor the total database size.

It's necessary to request a re-organisation from IBM in order to really reflect the size change.

Several types of re-organisations can be requested :

- Table re-org : The table will be re-organized to take less space. This won't affect the tablespace of database size. It will simply review the size taken by the table and its index to free some space.
  - Note that even if the table is empty, there is a minimum size defined for each table in the system. A table with 0 lines will therefore have the minimum size after re-org.
- Tablespace re-org : The full tablespace is re-organised. In this case it will move out and copy back all tables and reduce the size of the tablespace, It will effectively decrease the size of the database accordingly (reducing the "free" space).
- Full database re-org : This does a full re-org on all the tablespaces.

Symptom : Size of RSBKDATA or RSBKDATAINFO is huge.

Oss note : 2407784 - How to clean up RSBKDATA and related tables

#### Resolution

1. NEVER delete data from RSBKDATA/RSBKDATAINFO directly
  2. Make sure all corrections for reports RSBKCHECKBUFFER and RSBKCLEANUPBUFFER are implemented
  3. Apply the note: 2692909 P21; DTP; RSBKDATA: Deletion of temporary data also for TSN requests
  4. To clean up RSBKDATA and RSBKDATAINFO as much as possible, you can use the program RSBKCLEANUPBUFFER
- 1759601 - P30:DTP:Request temporary storage is deleted too soon
- - 1911677 - P32:DTP>Error handler no longer deleted
  -
- RSBKCHECKBUFFER - Cleaning Up the Temporary Storage of the Data Transfer Process  
RSBKCLEANUPBUFFER - Deletion of orphaned Entries in Errorstack/Log
5. SAP Recommends to run RSBKCHECKBUFFER DAILY in background: Cleaning Up the Temporary Storage of the Data Transfer Process
  6. For ADSOs, please refer to SAP Note 2228793 - ADSO DTP Request and Temporary Storage
- Currently, it is not to reduce the size of the table RSBKDATAPAKID.

RSBM\_ERRORLOG\_DELETE JOB Only on WBD

max 60 days.

DTP error logs to avoid to have big table

- RSBERRORLOG and RSBERRORCHANGED

General topics on the recurrent tasks done or could be done on BW environments :

## Delete log on table RSREQDPTID

This table contains the DPTID logs

1. Run program RSSM\_DEL\_OLD\_RSREQDPTID
2. Enter number of month that we need to keep

### Delete old entries from RSREQDPTID



Delete older than XX Months

24

| Main parameter    | Value     |
|-------------------|-----------|
| Delete older than | 24 months |

| Main tables cleaned |
|---------------------|
| RSREQDPTID          |

Reference: Note 2436631 - P37:  
Deletion report for old entries in table  
RSREQDPTID

After execute

|                                            |            |
|--------------------------------------------|------------|
| Delete old entries from RSREQDPTID         |            |
| Delete old entries from RSREQDPTID         |            |
| Delete old entries from RSREQDPTID         |            |
| Number of deleted records from RSREQDPTID: | 19,997,292 |