


How to Use Query Copy Program Z_COPY_QRY.

Introduction

Program: Z_COPY_QRY is used to copy queries from Production (WBP) to Development system (WBD), mainly to align the BW queries in WBD with Production (WBP) queries, alignment of queries in both systems is mandatory to enhance existing queries and move them to production.

Pre-Requisite

Authorization to run this program is hard coded with in this program. Your SAP USER ID is need to be added in with in this program to be able to run.

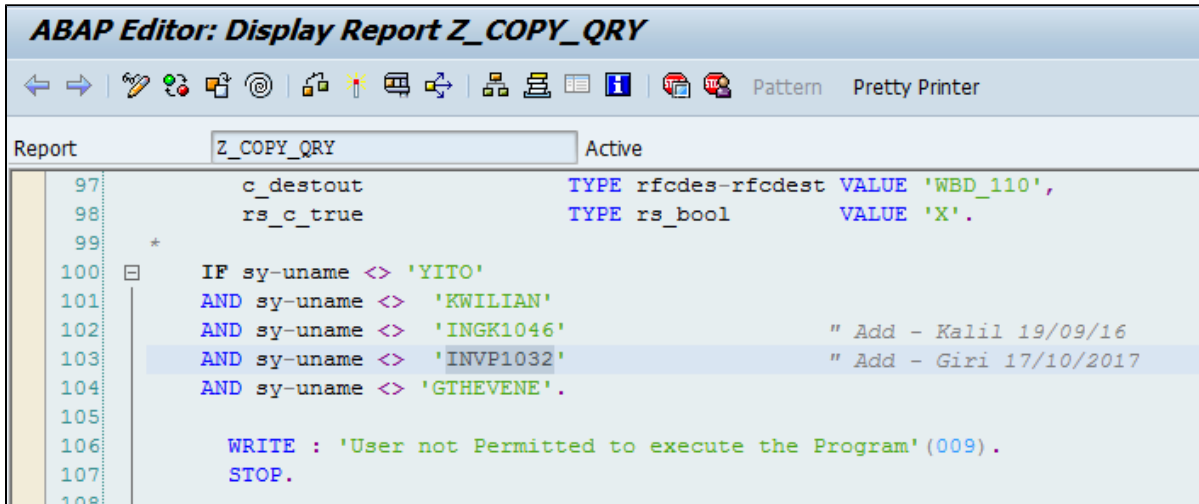


```
ABAP Editor: Display Report Z_COPY_QRY
Report: Z_COPY_QRY Active
97      c_destout      TYPE rfcdes-rfcdest VALUE 'WBD_110',
98      rs_c_true      TYPE rs_bool   VALUE 'X'.
99      *
100     IF sy-uname <> 'YITO'
101     AND sy-uname <> 'KWILIAN'
102     AND sy-uname <> 'INGK1046'           " Add - Kalil 19/09/16
103     AND sy-uname <> 'INVP1032'         " Add - Giri 17/10/2017
104     AND sy-uname <> 'GTHEVENE'.
105
106     WRITE : 'User not Permitted to execute the Program' (009).
107     STOP.
108
```

How to Run :

Program is saved in WBD.

GOTO TCODE : SE38 and enter Z_COPY_QRY (program name) and execute it by clicking F8 button.

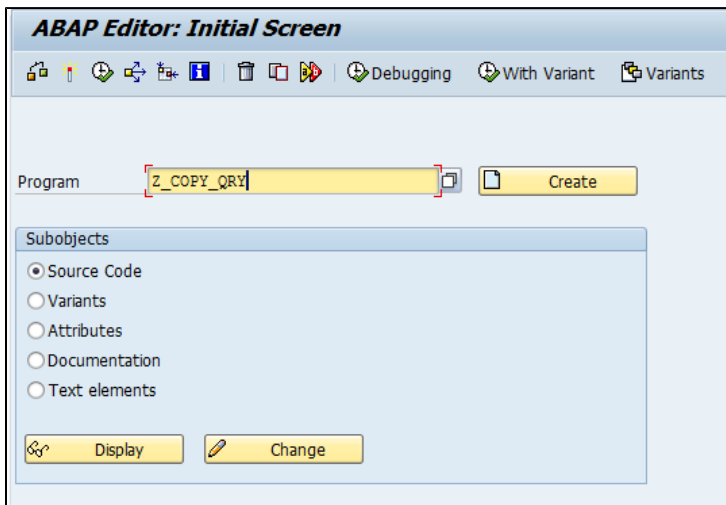

Once it is executed with F8, Below screen will be displayed asking you to enter query name to be copied and source system of query. Do not forge to select Update Query under Processing Mode.

Copy Query "FROM TO" (NOT AVAILABLE TO USERS, TECHNICAL PURPOSE ONLY)

PARAMETERS

Query Name
 Query's Technical Name

RFC
 Source System Origin of Query

Processing Mode
 Checklist Query
 Update Query

Click on 'YES'

Please check If Destination RFC Output is WBD_110 or WB1_110

Do you want to continue ? Default RFC Output is "WBD_110"

After its execution message will be displayed with the copy query name in WBD.

Copy Query "FROM TO" (NOT AVAILABLE TO USERS, TECHNICAL PURPOSE ONLY)

Copy Query "FROM TO" (NOT AVAILABLE TO USERS, TECHNICAL PURPOSE ONLY)

Query Save Successfully, Query Name = ZTEST_BW_QRY_MVCOPA01_0001


If you are facing an issue to collect query with in Transport Request with type of request error than you need to change the type from "Unclassified" to "Development".

Modifiable

- WBDK963695 PT99375626 S 4000014209: v002 BW Dev for PAX project 8095 - Rui
- WBDK963696 PT99375626 **Unclassified**
- Request Attributes

⚠ Need to be careful that copy queries can generate duplicate objects on CKF and RKF.

Table: RSZELTDIR

	V	ELTUID	Query	Long Description
	A	04B9BB0HZDMR3Y10KQ64BWPYQ	BW_CKF_MVSDSO50_0001	Confirmed Qty (PUQ)
	A	AKLI1L2RFQC0SNVE4NYKVUZZA		Confirmed Qty (PUQ)
	A	04B9BB0HZDMR3Y10KQ64C3KHE	BW_CKF_MVSDSO50_0002	Order Qty (PUQ)
	A	AKLI1L2RFQC0SNVE4NYKQMQXY		Order Qty (PUQ)

It can cause more time to delete the duplicate KF, otherwise the transport will be error.